AstroCel[®] III 5000

High Efficiency Particulate Air Filters

- H13 in accordance with EN1822
- 5000 m3/h air volume saves space
- · Low energy consumption




AstroCel III 5000 is classified H13 in accordance with EN1822.

The filter displays excellent efficiency on fine particulate matter and is designed for use in high air volume applications upto 5000 m³/h. Due to its high capacity the filter offers several benefits: in new installations, fewer filters are required to handle the same volume of air compared to HEPA filters of the same size with a lower capacity.

As a result, less installation space is required and installation time is significantly reduced. In existing installations, the filter's high media area ensures a low pressure drop which reduces energy costs.

Resistance vs Face Velocity

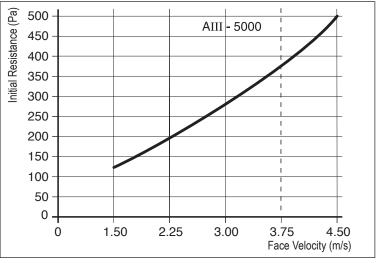



AstroCel[®]III 5000

An AstroCel III 5000 can be ordered using the following Component Code Definition System. Use the table to specify a product suitable to your application requirements.

Selection Table

ltem	Component	Component Code Definition			
Α	Type of Filter	A39 = AstroCell III			
В	Media	A = Waterproof Glass Fibre			
С	Cell Sides	05 = Sendzimir zinc coated steel			
		07 = Stainless steel 304 (4000)			
D	Separators	C = Thermoplastic			
E	Bond	9 = Polyurethane Cold Cured Resin			
F	Gasket	P = No gasket			
		D = Polyurethane foam, half round profile, one piece			
G	Gasket Location	0 = No gasket			
		2 = One face			
Н	Acceptance Level	G = H13, Min. 99.95% @ MPPS acc. to EN1822			
1	Faceguard Location	O = No faceguard			
K	Options	Consult local sales office			

Standard Sizes and Ratings

w	Nominal airflow		
Н	W	D	m³/h
610	610	292	5000

Notes:

1) Final resistance 750 Pa.

2) Temperature limit 70°C.

3) Initial resistance at nominal airflow: 375 Pa.

Efficiency

Efficiency @ 0.3 µm	Efficiency EN1822 @ MPPS				
99.99%	H13	99.95%			

For 3400 MDF or NG execution consult specification sheets RA-3-139 and RA-3-124. For AstroCel III 4000 execution consult specification sheet RA-3-129. **Bold typeface:** standard execution

How to Order

Below a typical example of how to order a standard AstroCel III 5000 filter using the Component Code Definition System.

Item	Α	В	С	D	Е	F	G	Н	I	К
Component Definition		А	05	С	9	S	2	Н	0	-

AAF-International B.V. P.O. Box 7928 1008 AC Amsterdam The Netherlands Tel.: + 31 20 549 44 11 Fax: + 31 20 644 43 98 www.aafeurope.com



International AAF Offices: Amsterdam (NL), Athens (GR), Brussels (B), Cramlington (GB), Dortmund (D), Dubai (UAE), Helsinki (Fin), Istanbul (TR), Lisbon (P), Louisville, Ky (USA), Madrid (E), Mexico (Mex), Mozzate-Co (I), Paris (F), Bangalore (IND), Riyadh (KSA), Shah Alam (Mal), Suzhou, Shenzhen (PRC), Singapore, Taiwan, Vienna (A)

AAF Agents: Johannesburg (RSA)

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

RA-5-129-IN-0307

© 2007 AAF International